



Critical Environment In-tool Ionizer

MODEL 5822i


The compact design of the Critical Environment In-tool Ionizing Blower, Model 5822i is designed to meet small-footprint ionizer requirements in automated process tools, offering exceptional performance in hard disk drive manufacturing and back-end semiconductor environments. The ionizer maintains a $\pm 3V$ or better balance standard and exceptional $\pm 1V$ with the optional external feedback system. An internal, automatic balance correction system ensures your target is ionized accurately, presenting significant reduction in calibration and maintenance time resulting in cost savings. A collimator installed over the fan directs precisely balanced ionized air to the target without taking up valuable room in your environment.




Features

- $\pm 3V$ or better balance ($\pm 1V$ with the optional external feedback system)
- Facility Monitoring System (FMS) connection and audible alarm
- Separate control box
- Cleanliness rated at ISO 14644 Class 4 (Fed. Std. 209e Class 10)

Benefits

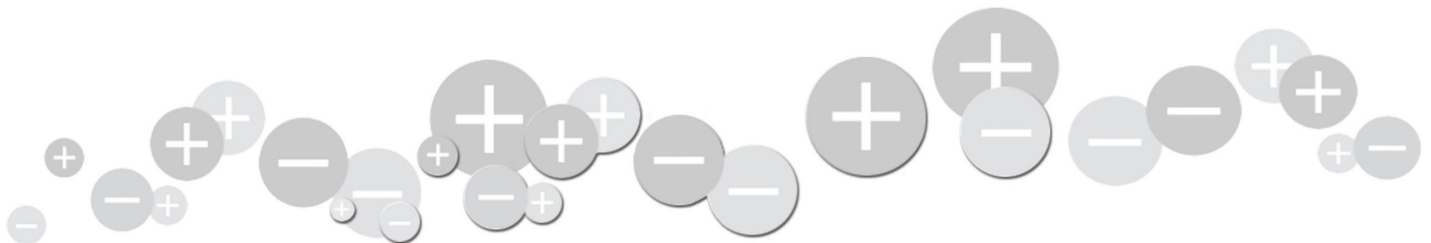- Provides the best corona-based ESD critical environment protection available for maximizing yields
- Faster response to ionization failure with notification through tool or FMS
- Allows the blower to be situated close to the target area for fast electrostatic discharge
- Designed for use in an environment with a controlled level of contamination



Input Voltage	24 VDC @ 1A from external power supply (100-240 VAC 50/60 Hz) or from tool power
Discharge¹	Between 2-2.5 sec @ 1 ft (typ), taken in-line from the center of the fan ($\pm 1000V-100V$)
Balance	$\pm 3V$ or better balance ($\pm 1V$ with the optional external feedback system)
Ion Emission	Steady-state DC
Emitters	Tungsten alloy emitter points, 8 per blower; titanium optional
Airflow	20.5 cfm (typ)
Cleanroom Class	Meets ISO 14644 Class 4 (Fed Std. 209E Class 10)
Operating Env.	Temperature 50-95°F (10-35°C); humidity 30-65% RH, non-condensing; ISO Cleanroom Class 7 (Fed Std. Class 10,000) or better
Indicators	Control Box: green POWER ON, red ALARM LEDs
Audible Noise	<56 dB, typical measurements taken 12" (30.5 cm) from fan
Mounting	2 mounting screw holes on bottom of blower, 1.20 in (3.05 cm) apart
Controls	Balance adjust, sensor gain adjust, fan "slow/off/fast" switch, variable "slow" fan speed
Enclosure	Stainless steel
Dimensions	Blower: 4.5"H x 3.3"W x 2.4"D (11.5 x 8.3 x 6.1 cm) Control Box: 1.0"H x 5.2"W x 2.4"D (2.5 x 13.2 x 6.0 cm)
Weight	Blower 1.14 lb (.51 kg); Control Box 0.56 lb (.25 kg)
Warranty	Two year limited warranty
Certifications	  

1. Tested in accordance with ANSI/ESD STM3.1-2015.

Ordering Information

92-5822i-001	Blower Kit with Tungsten Emitter Points (includes fan unit, control box, DC power supply kit and all interface cables)
92-5822iC-001	Blower Kit with Titanium Emitter Points (includes fan unit, control box, DC power supply kit and all interface cables)
Kit Contents (may be ordered separately)	91-5822i Fan Unit with Tungsten Emitter Points
	91-5822iC Fan Unit with Titanium Emitter Points
	91-5822i-CTRL Control Box
	33-5820-01 5822i Accessory Kit (see below for contents)
33-1440-01	DC Power Supply Kit, 100-240 VAC to 24 VDC 1A, interconnect cable with RJ-9 4P/4C plug (power cord req'd)
33-5820-01	5822i Accessories Kit (includes 33-1440-01 power supply kit, fan to control box cable and FMS out to Novx sensor cable)
25-20660	US Plug Power Cord, 8.2 ft (2.5m)
25-20710	UK Plug Power Cord, 8.2 ft (2.5m)
25-20735	German Schuko Plug Power Cord, 8.2 ft (2.5m)
25-20750	China Plug Power Cord, 8.2 ft (2.5m)
33-25822i-10	Ionizing Blower Mounting Stand
33-25822i	Tungsten Emitter Point Replacement Kit
33-25822iC	Titanium Emitter Point Replacement Kit


$\pm 1V$ Balance Performance

The Model 5822i ionizer's optional external feedback sensor operates with the Novx 7000 Process Monitor and with the Novx 3352 Passive or Novx 3362 Active Closed-loop Ionizer Controllers to detect and automatically correct the balance. With the antenna placed at the target area, feedback is sent to the Model 5822i blower's internal control system. This ensures that your target maintains a $\pm 1V$ or better balance at all times, no matter what environmental variables exist.



Directed Airflow

The collimator fits over the air outlet of the blower and directs ionized air straight to the target. This means that the blower can be placed further away from the target with continued excellent discharge times and good performance at extended distances. This faster, directed airflow method improves ion and static elimination, significantly minimizing ion recombination.

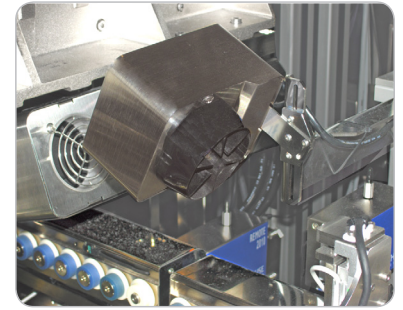

Control Box

The modular remote Control Box was developed to accommodate limited tool footprints. The Control Box connects to the optional Novx 7000 Process Monitor and with the Novx 3352 Passive or Novx 3362 Active Closed-loop Ionizer Controllers and common FMS (facility monitoring system) interfaces. This allows the ionizer to be installed into tight, hard-to-reach spaces without fitting additional connections or wiring into the area.



DS-5822i_V11 - 9/19
© 2019 Simco-Ion
All rights reserved.

Simco-Ion, Technology Group

1141 Harbor Bay Parkway, Suite 201
Alameda, CA 94502
Tel: +1 (800) 367-2452 (in USA)
Tel: +1 (510) 217-0460
ioninfo@simco-ion.com
www.simco-ion.com