




Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Overall cart dimensions of 31¼" width x 21¾" length for end-load models. Overall cart dimensions of 21¾" width x 31¼" length for side-load models. Transports 17¾" x 25¾" trays. Slides with 1½" spacing carry 38 trays. Slides with 3" spacing carry 20 trays. Overall height of 67¾". Four 5" resilient swivel casters, two with brake.

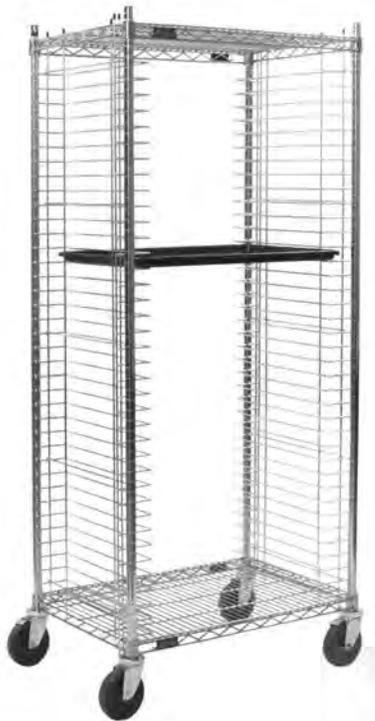

electronic tray cart, side load, with optional ESD tray

Options / Accessories

- ESD Tray
- ESD Grounding Cable
- Anti-Static Drag Chain

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our SpecFAB® Division.

Phone: 302-653-3000 • Fax: 302-653-3091 • e-mail: specfab@eaglegrp.com

Item No.:	_____
Project No.:	_____
S.I.S. No.:	_____

Electronic Tray Carts

MODELS:

- WTRE38-Z
- WTRE20-Z
- WTRS38-Z
- WTRS20-Z


Design and Construction Features

- A practical and economic method of transporting or storing 17¾" x 25¾" (454 x 654mm) conductive trays.
- Zinc-plated wire shelves, chrome posts, and aluminum split sleeves.
- 5" (127mm)-diameter swivel casters with resilient tread, two with brake.
- Units can be made conductive by adding an optional drag chain or ESD grounding cable.
- End-load and side-load units available.
- No tools required for assembly.
- Shipped knocked down.



Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Electronic Tray Carts

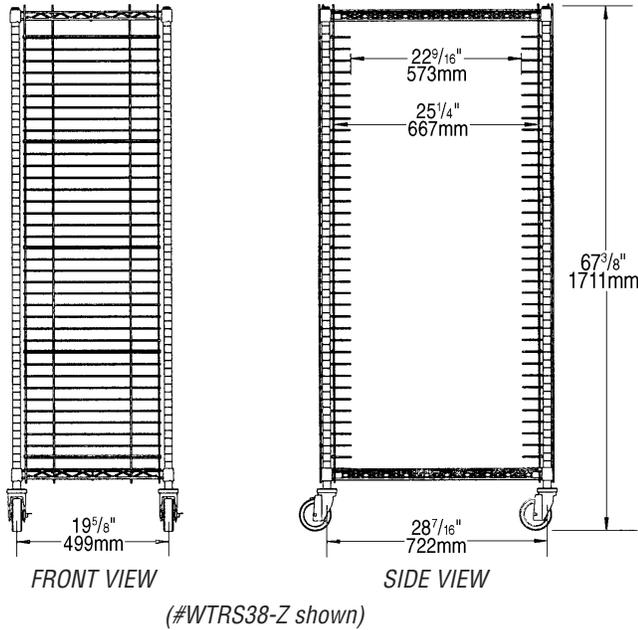


model #	description	overall dimensions						weight		sliding space		full size pan capacity
		width in.	width mm	length in.	length mm	height in.	height mm	lbs.	kg	in.	mm	
WTRE38-Z	end load	30"	762	21"	533	67 3/8"	1711	65	29.5	1 1/2"	38	38
WTRE20-Z	end load	30"	762	21"	533	67 3/8"	1711	74	33.6	3"	76	20
WTRS38-Z	side load	21"	533	30"	762	67 3/8"	1711	65	29.5	1 1/2"	38	38
WTRS20-Z	side load	21"	533	30"	762	67 3/8"	1711	74	33.6	3"	76	20

Options for Electronic Tray Carts

ESD Grounding Cable

Provides greater dependability on mobile units. Replaces conductive casters when used with conductive split sleeves. Easily installed.



model #
GC-16

Anti-Static Drag Chain

16" (406mm) long. Used for conductive applications.



model #
DC16-S

EAGLE GROUP
 100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 • Fax: 302-653-2065
 www.eaglegrp.com

Foodservice Division: Phone 800-441-8440
 MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A.
 ©2012 by Eagle Group
 Rev. 05/12

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.