


## UltiMat 2 Pre-Cut Mats

Reliable anti-static work surface mats for critical electronic work.

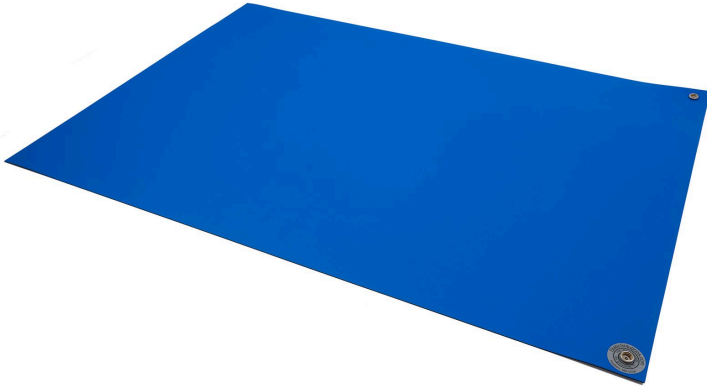

### OVERVIEW

Expertly designed for your basic ESD grounding needs, UltiMat 2 Pre-Cut Mats provide a reliable and convenient solution to protect your electronic equipment. These mats offer peace of mind and ensure safety in any workspace. With these pre-cut mats, easily and efficiently tackle your grounding needs.

Built from high-performance, two-layer rubber, these mats offer exceptional durability, heat and chemical resistance, and consistent static dissipation across demanding workstations. The embossed, non-glare surface stands up to heavy use while maintaining reliable grounding performance, making UltiMat 2 a trusted choice for EPA-compliant electronics manufacturing, repair benches, and precision assembly lines.

### APPLICATIONS

- Electronics Manufacturing
- Cleanroom / Critical Environments
- Aerospace & Defense
- Healthcare & Medical Devices
- Data Centers & Server Facilities
- OEM & Industrial Assembly

### KEY FEATURES & BENEFITS

#### Lifetime Electrical Warranty

Confidence that your mat maintains reliable ESD performance for years.

#### Durable & Stable

Crosslinked material won't delaminate, exude contaminants, or outgas.

#### Easy Installation

Designed for fast deployment with minimal downtime — no special tooling or adhesives required. Includes (2) 10mm female grounding snaps

#### Chemical & Temperature Resistant

Resists harsh environments without degrading.

#### Comfortable & Practical


Lays flat without curl, as durable as rigid laminates yet as soft as rubber.

#### Standards Compliant

RoHS, CE, ISO, and EOS/ESD S.20.20 compliant.

### PRODUCT SPECIFICATIONS

Surface Resistivity	10 <sup>6</sup> –10 <sup>8</sup> Ω/sq
Surface Finish	Embossed, non-glare
Dimensions	Pre-Cut Widths: 24", 30", 36", and 48" Pre-Cut Lengths: 36", 48", 60", and 72"
Thickness	1.5mm (.060") ±10%
Color / Finish	dark blue, light blue, light grey
Temperature Range	Up to 140 °C
Part Number(s)	SKUs: UM-24: 36, 48, 60, 72: DB, LB, LG UM-30: 36, 48, 60, 72: DB, LB, LG UM-36: 48, 60, 72: DB, LB, LG UM-48: 60, 72: DB, LB, LG

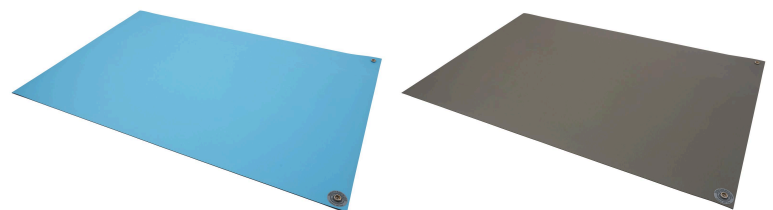

### COMPLIANCE & STANDARDS

ANSI/ESD S20.20 | REACH, RoHS, and Conflict Mineral compliant | CE | ISO