


# EasyReach™ Cleaning Tool

Contec's lightweight stainless steel EasyReach™ Cleaning Tool is designed for cleaning isolators, LAF hoods, glove boxes and other mini environments. Rectangular shape makes overlapping straight-line action easy to achieve. Hinged joint along with the ability to lay flat makes this lightweight tool comfortable and easy to use for accessing hard-to-reach areas.

The single-use, multi-layer cleaning pads are very absorbent, ensuring good even coverage of disinfectant or IPA. The easy grab edge on the cleaning pad ensures the pad fits tightly on the mop frame but is easy to replace with gloved hands. Dry pads are available ultrasonically sealed to provide a low level of particulates for use in product contact areas. Sterile knitted pads presaturated with 70% IPA are also available.

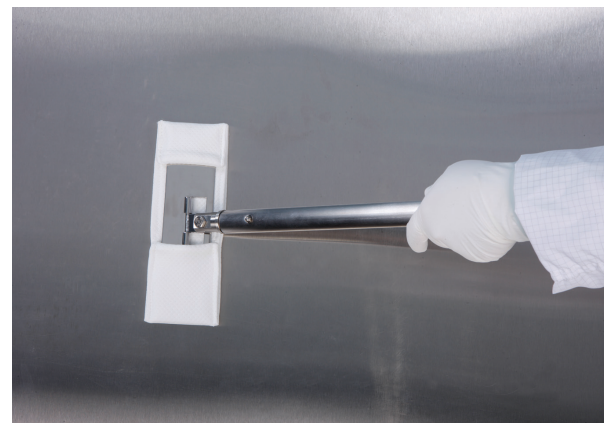

Features	Benefits
<b>Versatile and easy to use</b>	<ul style="list-style-type: none"> <li>• Specially designed cleaning pad tab/grip enables quick and easy fitting to the frame with gloved hands</li> <li>• All tool options are designed to be easily passed through transfer hatches</li> <li>• Versatile low profile, lay flat pivoting head ensures even the most awkward areas can be quickly reached with ease</li> <li>• Presaturated cleaning pad option removes the need for 70% IPA spray, minimizing transfer of materials and simplifying the cleaning procedure</li> </ul>
<b>Safe for users and equipment</b>	<ul style="list-style-type: none"> <li>• Reduces the risk of operators leaning into LAF hoods, opening isolators, intervening into RABS, and introducing contamination while attempting to ensure effective cleaning</li> <li>• Knitted presaturated pad option reduces operator exposure to high levels of VOCs typically experienced when using IPA spray bottles and reduces the volume of hazardous chemical storage</li> <li>• Rounded tool edges and strong, durable, double layer pads ensure equipment is not damaged during use</li> <li>• All components are designed to be chemical resistant, minimizing the risk of contamination from degradation</li> </ul>
<b>Ultrasonically sealed edges</b>	<ul style="list-style-type: none"> <li>• Dry pads are ultrasonically sealed and presaturated pads are sewn to generate less particles and fibers while remaining strong, durable, and compatible with common cleanroom solutions</li> <li>• The polyester cleaning pads leave no unwanted surface residues</li> <li>• Well-fitted quilted pad ensures effective, even surface coverage reducing the number of viable and non-viable contaminants and ensuring maximum residue removal</li> </ul>

Part No.	Description	Packaging
MEQT0021	EasyReach Ultrasonic Sealed 100% Knitted Polyester Cleaning Pads, 7.5" x 2.8" (19 x 7cm)	4 each/bag; 25 bags/case
MEQT0022	EasyReach Ultrasonic Sealed 100% Knitted Polyester Cleaning Pads, 7.5" x 2.8" (19 x 7cm), sterile	4 each/bag; 25 bags/case
PSME0001	EasyReach 100% Knitted Polyester Cleaning Pads, 7.5" x 2.8" (19 x 7cm), presaturated with 70% IPA, sterile	8 each/bag; 8 bags/case
2665LF	EasyReach Lay Flat Cleaning Tool, 16.5" (42cm), stainless steel, lightweight, 1 piece	1 each/case
2685LF	QuickConnect EasyReach lay flat mop head frame, 75" (19cm), stainless steel	1 each/case

**Product Information (2685LF, 2665LF)**

Material	Stainless steel	Type 304 stainless steel
Compatible Mop Pads	MEQT0021, MEQT0022, PSME0001	

**Product Information (MEQT0021, MEQT0022)**

Cover material	100% knitted polyester	
Construction	Multi-layer ultrasonically quilted; ultrasonically sealed	
ISO Class	4-8	
cGMP Grade	A/B for sterile, C/D for non-sterile	
Compatible Mop Frames	2685LF, 2665LF	
Shelf Life	For Sterile Products; 2 years from manufacturing date	

**Technical Data**

Attribute (units)	Typical Value*	Test Method**
Mop weight, dry; (g)	18.68	CTM004-03
Sorbent capacity; (mL/mop)	73	CTM004-03
Particles, P $\geq$ 0.5 $\mu$ m; ( $\times 10^6/m^2$ )	0.24	IEST-RP-CC004.2, Sec. 5.1
Fibers > 100 $\mu$ m; ( $\times 10^3/m^2$ )	0.01	IEST-RP-CC004.2, Sec. 5.2

**Product Information (PSME0001)**

Cover material	100% knitted polyester	
Construction	Multi-layer ultrasonically quilted; sewn	
ISO Class	4-8	
cGMP Grade	A/B for sterile, C/D for non-sterile	
Compatible Mop Frames	2685, 2665SF	
Shelf Life	For Sterile Products; 2 years from manufacturing date	

**Technical Data**

Attribute (units)	Typical Value*	Test Method**
Mop weight, dry; (g)	240	CTM004-03
Sorbent capacity; (mL/mop)	63	CTM004-03
Particles, P $\geq$ 0.5 $\mu$ m; ( $\times 10^6/m^2$ )	3.25	IEST-RP-CC004.2, Sec. 5.1
Fibers > 100 $\mu$ m; ( $\times 10^3/m^2$ )	0.22	IEST-RP-CC004.2, Sec. 5.2

**\*Notes**

- The data shown are typical values and should not be used as product specifications.
- Valid product comparisons may only be obtained through side-by-side testing in the same test facility, under similar conditions.
- Current and/or comparison data may be available. Please contact a Contec sales representative for details.

**\*\*Test Methods:**

- CTM – Refers to Contec Test Method
- IEST-RP-CC004.3, Evaluating Wiping Materials Used in Cleanroom and Other Controlled Environments, Institute of environmental Sciences and Technology, Rolling Meadows IL.