

45 SERIES

STANDARD FABRIC



Super Heavy Duty 450 lbs, Capacity, Waterfall 3" High Resilient Density Foam for Better Comfort

MODEL		Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Drag Chain	Caster
A45-F	Fabric	21"-31"	18"W x 17"D	15.5"W x 13"H	18"	Polished Aluminum	No	1
A47-F	Fabric	17"-22"	18"W x 17"D	15.5"W x 13"H	No	Polished Aluminum	No	1
P45-F	Fabric	21"-31"	18"W x 17"D	15.5"W x 13"H	18''	Black Nylon	Yes	1
P47-F	Fabric	17"-22"	18"W x 17"D	15.5"W x 13"H	No	Black Nylon	Yes	1

Pavarotti Group III

- 100% Polyolefin, 250,000 Double Rubs, Flame Resistance: California Tech Bulletin 117, Sec. E CS-191-53, Class 1;
- BIFMA X5.7-1991, NFPA 260-1989, Class 1; UFAC B.S. 5852 Part 1





Controls	Description		
DLC	Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob		
ST	Height and Seat and Back Tilt (This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob		
FLC	Three Lever for Individual Lift (Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob		








FR04 FR05 FR06

Footring	Description	
FR04	Knobless Nylon Footring 18"	
	The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)	
FR05	Knobless Aluminum with Steel Ring 20"	
	The Footring is Loosened and Tightened by Turning the Outer Footring. (option for models 10, 20M and 20W)	
FR06	Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)	



Arms	Description	
TF Fixed Height and Width, Black		
TA	TA Fixed Height and Adjustable Width, Black	
TAA	Adjustable Height and Adjustable Width	

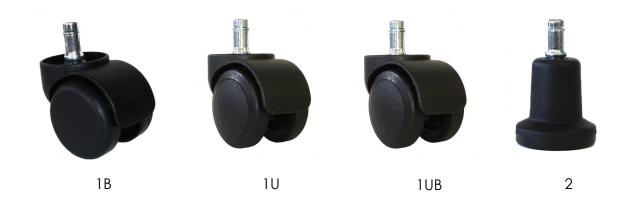

Caster	Description
1B	Braking Caster , Recommended where Chairs may roll to easily when is Not Occupied
1U	Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces
1UB	Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied
2	Nylon Glide, Recommended for use in areas where requiring limited mobility