



10 SERIES

STANDARD VINYL



AL10-V



AL12-V



PL10-V



PL12-V


Super Heavy Duty 450 lbs. Capacity, 3" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat & Back

Model	Upholstery Type	Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Caster
AL10-V	Vinyl	21"-31"	20" W x 18" D	15" W x 12" H	20"	Polished Aluminum	1
AL12-V	Vinyl	17"-22"	20" W x 18" D	15" W x 12" H		Polished Aluminum	1
PL10-V	Vinyl	21"-31"	20" W x 18" D	15" W x 12" H	20"	Black Nylon	1
PL12-V	Vinyl	17"-22"	20" W x 18" D	15" W x 12" H		Black Nylon	1

PreFixx Group II

- 100 Vinyl Face, Poly/cotton Backing, • Protective Coating for Increased Stain Resistance, • Abrasion 400,000 Double Rubs

- Meets or Exceeds California Tech Bulletin 117, Boston Fire Dept. IX-1, • Federal Standard A-A-2950, • UFAC Fabric Class 1, • FMVSS-302




Blue-211



Navy-221



Burgundy-261




Black-251



Grey-231



Grey-232



Grey-233



AM10-V



AM12-V



PM10-V



PM12-V


Super Heavy Duty 450 lbs, Capacity, 3" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat & Back

Model	Upholstery Type	Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Caster
AM10-V	Vinyl	21"-31"	20" W x 18" D	16" W x 16" H	20"	Polished Aluminum	1
AM12-V	Vinyl	17"-22"	20" W x 18" D	16" W x 16" H		Polished Aluminum	1
PM10-V	Vinyl	21"-31"	20" W x 18" D	16" W x 16" H	20"	Black Nylon	1
PM12-V	Vinyl	17"-22"	20" W x 18" D	16" W x 16" H		Black Nylon	1

PreFixx Group II

- 100 Vinyl Face, Poly/cotton Backing, • Protective Coating for Increased Stain Resistance, • Abrasion 400,000 Double Rubs

- Meets or Exceeds California Tech Bulletin 117, Boston Fire Dept. IX-1, • Federal Standard A-A-2950, • UFAC Fabric Class 1, • FMVSS-302

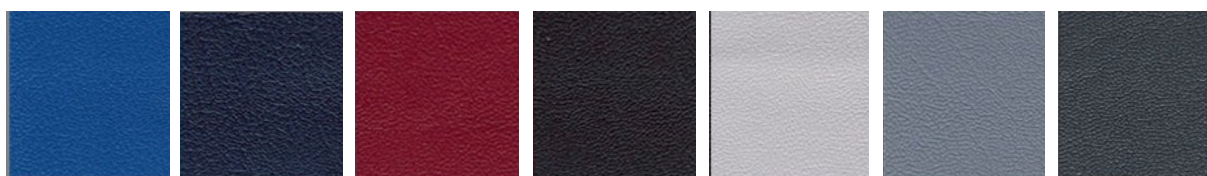

Blue-211

Navy-221

Burgundy-261

Black-251

Grey-231

Grey-232

Grey-233



AE10-V



AE12-V



PE10-V




PE12-V

Super Heavy Duty 450 lbs. Capacity, 3" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat & Back

Model	Upholstery Type	Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Caster
AE10-V	Vinyl	21"-31"	20" W x 18" D	19" W x 16.5" H	20"	Polished Aluminum	1
AE12-V	Vinyl	17"-22"	20" W x 18" D	19" W x 16.5" H		Polished Aluminum	1
PE10-V	Vinyl	21"-31"	20" W x 18" D	19" W x 16.5" H	20"	Black Nylon	1
PE12-V	Vinyl	17"-22"	20" W x 18" D	19" W x 16.5" H		Black Nylon	1

PreFixx Group II

-
- 100 Vinyl Face, Poly/cotton Backing, • Protective Coating for Increased Stain Resistance, • Abrasion 400,000 Double Rubs
-
- Meets or Exceeds California Tech Bulletin 117, Boston Fire Dept. IX-1, • Federal Standard A-A-2950, • UFAC Fabric Class 1, • FMVSS-302
-

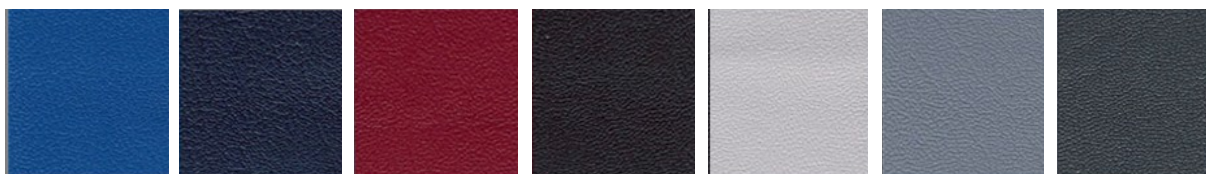

Blue-211

Navy-221

Burgundy-261

Black-251

Grey-231

Grey-232

Grey-233



DLC



ST



FLC

Controls	Description
DLC	Height and Back Tilt (This control has two levers for seat height and back angle)
ST	Height and Seat and Back Tilt (This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob)
FLC	Three Lever for Individual Lift (Height lever adjustment, seat tilt adjustment back)



FR04



FR05



FR06

Footring	Description
FR04	Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for
FR05	Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Footring. (option
FR06	Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)



TF



TA



TAA

Arms	Description
TF	Fixed Height and Width, Black
TA	Fixed Height and Adjustable Width, Black
TAA	Adjustable Height and Adjustable Width



1B



1U



1UB



2

Caster	Description
1B	Braking Caster , Recommended where Chairs may roll to easily when is Not Occupied
1U	Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces
1UB	Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied
2	Nylon Glide, Recommended for use in areas where requiring limited mobility