



- ① Sheet metal housing
- ② Driver
- ③ Optional dimmer access
- ④ Light diffuser
- ⑤ Optional battery pack

TOP VIEW

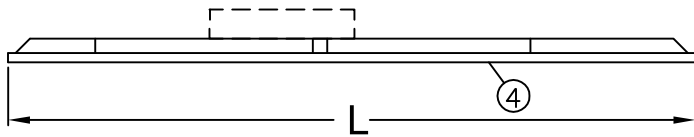

SIDE VIEW

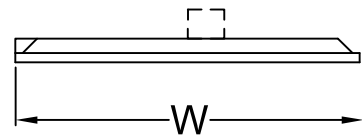

END VIEW

NOM. SIZE	WEIGHT (LBS)	DIM 'W'	DIM 'L'
2' x 4'	15	23.7"	47.7"
2' x 2'	12	23.7"	23.7"
1' x 4'	5.5	11.9"	47.7"

SPECIFICATIONS LED LIGHT FIXTURES

2' X 4' NOMINAL

PART NUMBER	WATTS	LUMENS	COLOR
42L-10001	45	4920/5200/5040	CS

2' X 2' NOMINAL

PART NUMBER	WATTS	LUMENS	COLOR
22L-10001	36	3820/4000/4000	CS

1' X 4' NOMINAL

PART NUMBER	WATTS	LUMENS	COLOR
41L-10001	30	3600/3790/3700	CS

"CS" = COLOR SELECTABLE - 3500K/4000K/5000K

HOUSING CONSTRUCTION:

- EXTRUDED ALUMINUM AND GALVANIZED STEEL BACK PANEL

VOLTAGE:

- UNIVERSAL (120-277 VAC)

DIMMABLE:

- 0-10V CONTROL

OPTIONS:

- FOR BATTERY BACKUP FIXTURE ADD -B TO PART NUMBER

SUITABLE FOR CLEANROOM CLASSES ISO 5-8

