



10 SERIES

CLEANROOM VINYL



AL10-VCR



AL12-VCR



PL10-VCR



PL12-VCR


Super Heavy Duty 450 lbs, Capacity, 3" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat & Back

Model	Upholstery Type	Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Caster
AL10-VCR	Cleanroom Vinyl	21"-31"	20" W x 18" D	15" W x 12" H	20"	Polished Aluminum	1
AL12-VCR	Cleanroom Vinyl	17"-22"	20" W x 18" D	15" W x 12" H		Polished Aluminum	1
PL10-VCR	Cleanroom Vinyl	21"-31"	20" W x 18" D	15" W x 12" H	20"	Black Nylon	1
PL12-VCR	Cleanroom Vinyl	17"-22"	20" W x 18" D	15" W x 12" H		Black Nylon	1

Industrial Seating™ offers clean room seating designed to maintain reduced particulate levels as specified in federal standards 209E, Class 10/.2 micron and or class 100/.5 micron **Sealed System:** On Industrial Seating™ cleanroom seating, the air passed through three 99.99% effective .2 micron filter systems. These filters allow air within the sealed cushions to be expelled under minimal pressure. This filtering system first "strains out" larger particles, then traps all particles down to below .02 micron size. Permanent adhesives are used to double seal edges of all cover materials used on Industrial Seating™ class 10 and class 100 clean room seating.

PreFix Group II

- 100 Vinyl Face, Poly/cotton Backing, • Protective Coating for Increased Stain Resistance, • Abrasion 400,000 Double Rubs
- Meets or Exceeds California Tech Bulletin 117, Boston Fire Dept. IX-1, • Federal Standard A-A-2950, • UFAC Fabric Class 1, • FMVSS-302

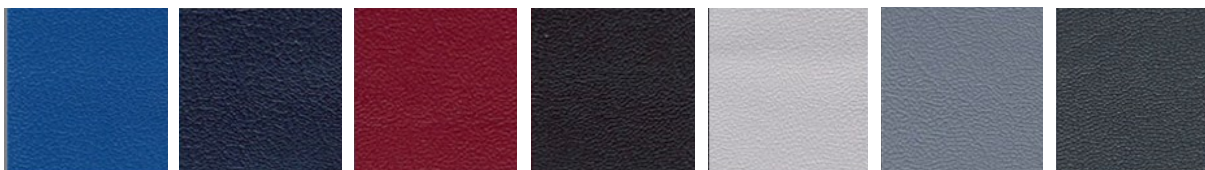

Blue-211

Navy-221

Burgundy-261

Black-251

Grey-231

Grey-232

Grey-233



AM10-VCR



AM12-VCR



PM10-VCR



PM12-VCR


Super Heavy Duty 450 lbs, Capacity, 3" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat & Back

Model	Upholstery Type	Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Caster
AM10-VCR	Cleanroom Vinyl	21"-31"	20" W x 18" D	16" W x 16" H	20"	Polished Aluminum	1
AM12-VCR	Cleanroom Vinyl	17"-22"	20" W x 18" D	16" W x 16" H		Polished Aluminum	1
PM10-VCR	Cleanroom Vinyl	21"-31"	20" W x 18" D	16" W x 16" H	20"	Black Nylon	1
PM12-VCR	Cleanroom Vinyl	17"-22"	20" W x 18" D	16" W x 16" H		Black Nylon	1

Industrial Seating™ offers clean room seating designed to maintain reduced particulate levels as specified in federal standards 209E, Class 10/.2 micron and or class 100/.5 micron **Sealed System:** On Industrial Seating™ cleanroom seating, the air passed through three 99.99% effective .2 micron filter systems. These filters allow air within the sealed cushions to be expelled under minimal pressure. This filtering system first "strains out" larger particles, then traps all particles down to below .02 micron size. Permanent adhesives are used to doubled seal edges of all cover materials used on Industrial Seating™ class 10 and class 100 clean room seating.

Prefix Group II

- 100 Vinyl Face, Poly/cotton Backing, • Protective Coating for Increased Stain Resistance,
- Abrasion 400,000 Double Rubs
- Meets or Exceeds California Tech Bulletin 117, Boston Fire Dept. IX-1, • Federal Standard A-A-2950, • UFAC Fabric Class 1, • FMVSS-302

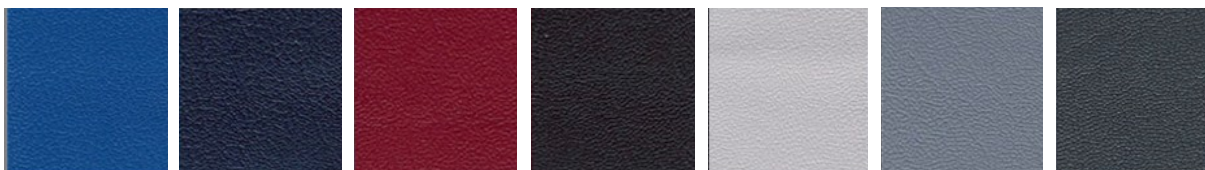

Blue-211

Navy-221

Burgundy-261

Black-251

Grey-231

Grey-232

Grey-233



AE10-VCR



AE12-VCR



PE10-VCR



PE12-VCR


Super Heavy Duty 450 lbs, Capacity, 3" High Resilient Density Foam for Better Comfort, Rubber Edge Banding Protection on Seat & Back

Model	Upholstery Type	Height Adjustment	Seat Dimensions	Back Dimensions	Footring	Base	Caster
AE10-VCR	Cleanroom Vinyl	21"-31"	20" W x 18" D	19" W x 16.5" H	20"	Polished Aluminum	1
AE12-VCR	Cleanroom Vinyl	17"-22"	20" W x 18" D	19" W x 16.5" H		Polished Aluminum	1
PE10-VCR	Cleanroom Vinyl	21"-31"	20" W x 18" D	19" W x 16.5" H	20"	Black Nylon	1
PE12-VCR	Cleanroom Vinyl	17"-22"	20" W x 18" D	19" W x 16.5" H		Black Nylon	1


Industrial Seating™ offers clean room seating designed to maintain reduced particulate levels as specified in federal standards 209E, Class 10/.2 micron and or class 100/.5 micron **Sealed System:** On Industrial Seating™ cleanroom seating, the air passed through three 99.99% effective .2 micron filter systems. These filters allow air within the sealed cushions to be expelled under minimal pressure. This filtering system first "strains out" larger particles, then traps all particles down to below .02 micron size. Permanent adhesives are used to doubled seal edges of all cover materials used on Industrial Seating™ class 10 and class 100 clean room seating.

PreFixx Group II

- 100 Vinyl Face, Poly/cotton Backing, • Protective Coating for Increased Stain Resistance,
- Abrasion 400,000 Double Rubs
- Meets or Exceeds California Tech Bulletin 117, Boston Fire Dept. IX-1, • Federal Standard A-A-2950, • UFAC Fabric Class 1, • FMVSS-302




Blue-211



Navy-221



Burgundy-261




Black-251



Grey-231



Grey-232



Grey-233



DLC



ST



FLC

Controls	Description
DLC	Height and Back Tilt (This control has two levers for seat height and back angle adjustment and back height adjustment with knob)
ST	Height and Seat and Back Tilt (This control has two levers, one for height adjustment and the other for Seat and Back tilt adjustment and back height with knob)
FLC	Three Lever for Individual Lift (Height lever adjustment, seat tilt adjustment back tilt adjustment and height back adjustment with knob and a seat tension knob)



FR04



FR05



FR06

Footring	Description
FR04	Knobless Nylon Footring 18" The Footring is Loosened and Tightened by Turning the Outer Ring. (option for models 20S, 45, 50 and 60)
FR05	Knobless Aluminum with Steel Ring 20" The Footring is Loosened and Tightened by Turning the Outer Footring. (option for models 10, 20M and 20W)
FR06	Nylon Center with Steel Ring, Footring 18" (option for models 20S, 45, 50 and 60)



TF



TA



TAA

Arms	Description
TF	Fixed Height and Width, Black
TA	Fixed Height and Adjustable Width, Black
TAA	Adjustable Height and Adjustable Width



1B



1U



1UB



2

Caster	Description
1B	Braking Caster , Recommended where Chairs may roll to easily when is Not Occupied
1U	Soft Urethane Caster, Recommended on Tile, Cement and other Hard Surfaces
1UB	Soft Urethane Braking Caster, Recommended for reduce Mobility when is Not Occupied
2	Nylon Glide, Recommended for use in areas where requiring limited mobility